



Features

- 60MHz Bandwidth Coverage 410-470 MHz bands**
 Advanced data link design for high performance over entire band
- High Air Link Rate**
 19200bps(GMSK)
- Multiple Protocol Support**
 Support TRIMMK3, TRIMTALE and TRANSEOT protocols.
- High Environmental Capabilities**
 Wide temperature specifications.
 High vibration tolerance
- Compact Structural**
 Size: 75.3x46x11mm

OEM Modem HX-DU5005D

Harxon radio modems provide reliable data communications for mission-critical applications where a combination of stability, supreme performance and long range are required.


HX-DU5005D is a 1W and 5W UHF transceiver designed for integration into products that require either a one- or two-way radio communication link that is configurable for operation between 410-470MHz. This modem provides reliable operation with sophisticated features which make them versatile and easy to use for a wide variety of applications. Their compact size and ease-of-use make these units perfect for innumerable mobile / remote data applications.

HX-DU5005D integrating the latest modem technology from Harxon, which can be widely used in oil and gas field monitoring, water and waste water management, automatic vehicle location, differential GPS navigation and differential and RTK survey correction applications

Technical Specifications

General Specification		
Frequency range	410~470MHz	
Operating mode	Half-duplex	
Channel spacing	25KHz, 12.5KHz	
Modulation type	GMSK	
Operation voltage	8.4V	
Power dissipation(Typical)	High power level	16.5W @ DC 8.4V
	Low power level	7.6W @ DC 8.4V
	Receiver	0.9W @ DC 8.4V
Frequency stability	≤±1.0ppm	
Size	75.3×46×11mm	
Weight	About 70g	
Temperature(operation)	-40℃~+70℃	
Temperature (storage)	-40℃~+85℃	

Antenna port	MMCX	
Antenna impedance	50ohm	
Data interface	30pin 0.5mm	
Transmitter		
RF output power	High level (5W)	38±1dBm@DC 8.4V
	Low level (1W)	30±1dBm@DC 8.4V
Power stability	±1dB0.5	
Harmonics	>52dB	
Receiver		
Sensitivity	-115dBm@BER 10 ⁻³ , 9600bps	
Co-channel rejection	>-12dB	
Adjacent channel selectivity	>52dB@25KHz	
Modem		
Air baud rate	4800bps、9600bps、19200bps	
Modulation type	GMSK	
Serial port baud rate	9600 bps、19200 bps、38400 bps、57600 bps、115200 bps	

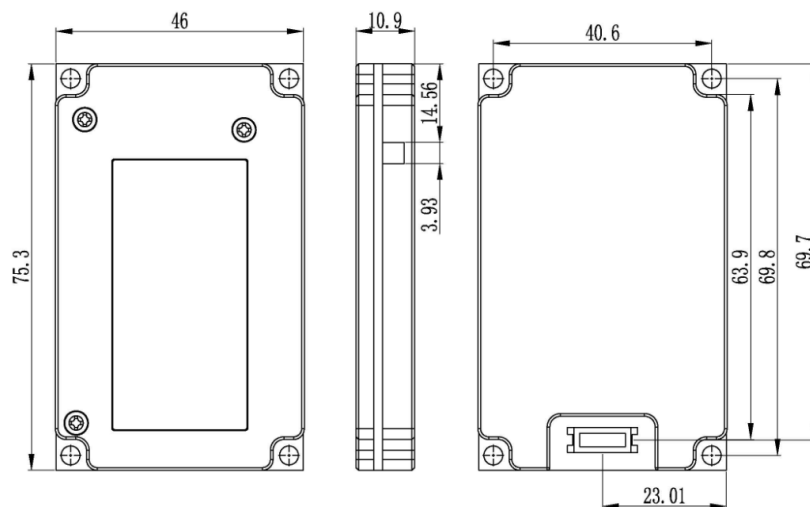

Dimension (mm)

Harxon Corporation

www.harxon.com sales@harxon.com
Tel: +86 0755-26989948 Fax: +86 0755-26989994



Orbitica

www.orbitica.com
contact@orbitica.com
+33 (0)5 62 24 31 76

HARXON AUTHORIZED DISTRIBUTION PARTNER